




HANSAECO control cartridge 4.8; water brake at approx. 50% water rate; ceramic discs with integrated grease wells; scalding protection adjustable (except 0914, 0912, 0123, 0148); volume restrictor indefinitely variable up to approx. 6 l/min

- Spare parts
- Limitation option for maximum temperature and flow-rate
- \varnothing 48 mm ceramic eco cartridge for flow and temperature control

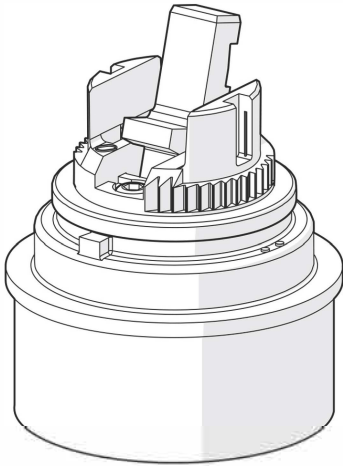

Technical data
